


Labeled with Rosenberger-Logo, ident.no. and torque

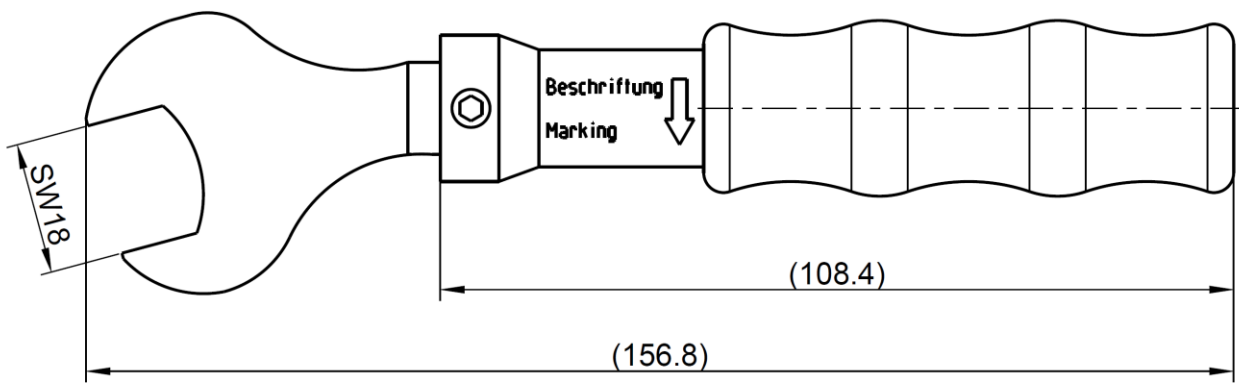

All dimensions are in mm

**Documents**

Application note

AN001 "Calibration Services"

**Material and plating**

**Tooling parts**

Spanner

**Material**

Stainless steel

**Mechanical data**

Torque setting

2.00 Nm ± 0.10 Nm (force applied in the middle of handle)

Width across flats

18 mm

Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG

RF\_35/09.14/6.2

**Declaration of calibration options**

**Factory Calibration**

Standard delivery for this torque wrench includes a Factory Calibration. The Calibration Certificate issued reports individual mechanical calibration results, traceable to national / international standards.

**Accredited Calibration**

Not available.

*For further, more detailed information see application note AN001 on the Rosenberger homepage.*

**Calibration interval**

Recommendation 12 months

**Packing**

Standard 1 pce in box  
 Weight 154.5 g/pce

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Herbert Babinger	11.03.05	Florian Reiner	21.02.25	g00	25-0071	Matthias Gehl	21.02.25
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de						Tel. : +49 8684 18-0 Email : info@rosenberger.de	
							Page
							2 / 2