



Cable assembly
RPC-2.92 plug – RTK 125 – RPC-2.92 jack - Armour

LU8-505-XXX

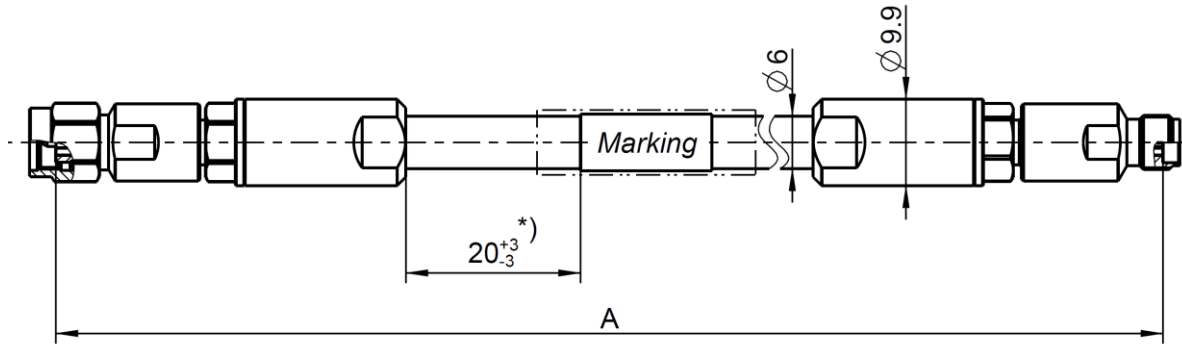

All dimensions are in mm; tolerances: ± 3 mm for $A \leq 300$ mm; $\pm 1\%$ for $A > 300$ mm
*) If length "A" < 150 mm marking is mount centric ± 5 mm

Available variants

Type	Insertion loss at 43.5 GHz	Marking	Weight (g) / pce
LU8-505-XXX	≤ 0.00365 dB/mm * A mm + 0.9 dB	ROSENBERGER ssss LU8-505-XXX FAC-RRRRRRR 	0.084 g/mm * A mm + 33.4 g

XXX – length in mm = A
ssss – serial no. FAC – Factory Code RRRRRRR – lot no. Barcode = includes factory code, lot no. and serial no.

Note: max. Insertion Loss:
First constant = Cable attenuation in dB/mm; Second Constant = Connector left and Connector right + needed Adaptor

Weight:
First constant = Cable- and Armour- weight per mm; Second Constant = Connector left and Connector right weight per pce

Assembly parts

Connector left	RPC-2.92 plug	02S129-2U8S3
Connector right	RPC-2.92 jack	02K129-2U8S3
Cable	RTK 125	
Armour	T3 Armour	
Clamping sleeve	Stainless steel	09S129-2U8/43
Tension sleeve	Stainless steel	02S129-2U1/44

Electrical data

Impedance	50 Ω
Frequency	DC to 43.5 GHz
Return loss ¹	≥ 16 dB, DC to 43.5 GHz
Insertion loss ¹	see table available variants

Individual testing and documentation:
Measurement plot with all 4 S-Parameters (S11; S22; S21; S12) and the care and handling instruction are included with the cable assembly. Measurement adaptors used are mentioned in the commentary field.

¹ Return Loss and Insertion Loss includes the measurement adaptor

Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG

RF_35/09.14/6.2

Technical Data Sheet

Rosenberger

Cable assembly
RPC-2.92 plug – RTK 125 – RPC-2.92 jack - Armour

LU8-505-XXX

Mechanical data

Minimum bend radius:
Multiple 32 mm

Environmental data

Temperature range -40°C to +125°C
RoHS compliant

Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
S. Andorfer	11.02.20	H. Babinger	12.12.24	a00	24-s313	M. Gehl	12.12.24

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosa-internal.com www.rosenberger.de	Tel. : +49 8684 18-0 Email : info@rosenberger.de	Page 2 / 2
--	--	---------------

RF_35/09_14/6.2