
Technical Data Sheet		Rosenberger		
RPC-N 75 Ω	Calibration Load Plug	P5S170-C11S3		

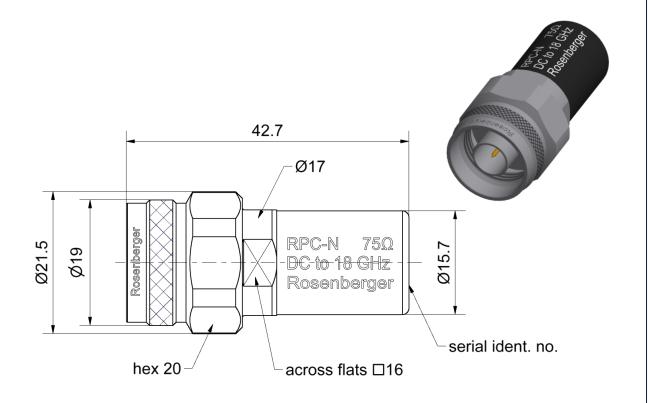

All dimensions are in mm; tolerances according to ISO 2768 m-H

100.0			
Im	ter	та	ce

According to IEC 61169-16

Documents

Application note AN001 "Calibration Services"

Material and plating Connector parts

Center conductor Coupling nut Outer conductor Dielectric Substrate

Material

Plating CuBe Gold, min. 1.27 µm, over nickel Stainless steel **Passivated** Stainless steel **Passivated** PS Al_2O_3

Tel. : +49 8684 18-0

Email: info@rosenberger.de

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de

Page

1/3

RFB00035/12.20/6.4

Technical Data Sheet Rosenberger

RPC-N Calibration Load 75 Ω Plug

P5S170-C11S3

Electrical data

Frequency range DC to 18 GHz

Return loss ≥ 40 dB, DC to 4 GHz

 \geq 32 dB, 4 GHz to 8 GHz \geq 30 dB, 8 GHz to 12 GHz \geq 22 dB, 12 GHz to 18 GHz

DC Resistance 75 $\Omega \pm 0.75 \Omega$ Power handling $\leq 0.5 \text{ W}$

Mechanical data

 $\begin{array}{ll} \text{Mating cycles} & \geq 500 \\ \text{Maximum torque} & 1.70 \text{ Nm} \\ \text{Recommended torque} & 1.10 \text{ Nm} \\ \end{array}$

Gauge 5.28 mm to 5.36 mm

General standard definitions

For proper operation the vector network analyzer (VNA) needs a model describing the electrical behaviour of this calibration standard. The different models, units, and terms used will depend on the VNA type and they will have to be entered into the VNA. All values are based on typical geometry and plating.

 $\begin{array}{ll} \text{Offset Z_{\circ} / Impedance / Z_{\circ}} & 75 \ \Omega \\ \text{Offset Delay} & 0.0000 \ \text{ps} \\ \text{Length (electrical) / Offset Length} & 0.00 \ \text{mm} \\ \text{Offset Loss} & 0.00 \ \text{G}\Omega/\text{s} \\ \end{array}$

Loss $0.0000 \, dB/\sqrt{GHz}$

Environmental data

Operating temperature range¹ +20 °C to +26 °C
Rated temperature range of use² 0 °C to +50 °C
Storage temperature range -40 °C to +85 °C

RoHS compliant

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de

Tel.: +49 8684 18-0 Email: info@rosenberger.de Page

2/3

¹ Temperature range over which these specifications are valid.

² This range is underneath and above the operating temperature range, within the calibration adaptor is fully functional and could be used without damage.

Technical Data Sheet		Rosenberger		
RPC-N	Calibration Load	P5S170-C11S3		

Declaration of calibration options

Factory Calibration

Standard delivery for this calibration standard includes a Factory Calibration. The Calibration Certificate issued reports individual calibration results, traceable to national / international standards. Model based standard definitions are reported in an Agilent/Keysight, Rohde & Schwarz and Anritsu compatible VNA format.

Accredited Calibration

Optional this calibration standard can be delivered with an Accredited Calibration (DAkkS) up to 12 GHz having the highest confidence in the traceability. The DAkkS Calibration Certificate issued reports individual calibration results in a complex format, traceable to national / international standards. Model based standard definitions are individually optimized and reported in an Agilent/Keysight, Rohde & Schwarz and Anritsu compatible VNA format as well as in a dense data set needed for data based standard definitions. The uncertainties are smaller than in a Factory Calibration.

For further, more detailed information see application note AN001 on the Rosenberger homepage.

Calibration interval	
Recommendation	12 months
Packing	
Standard	1 pce in box
Weight	43.9 g/pce

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

For the installation of the electrotechnical equipment, particular electrotechnical expertise is required.



Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Marion Striegler	12.08.21	Lars Ramtke	22.04.22	b00	22-1011	David d'Argent	22.04.22

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de

Tel. : +49 8684 18-0 Email : info@rosenberger.de Page 3/3