


Cable Set  
Mini Coax Plug / Jack – RPC-2.92 Plug – RTK 047

**L99-A0483-XXX-Y**

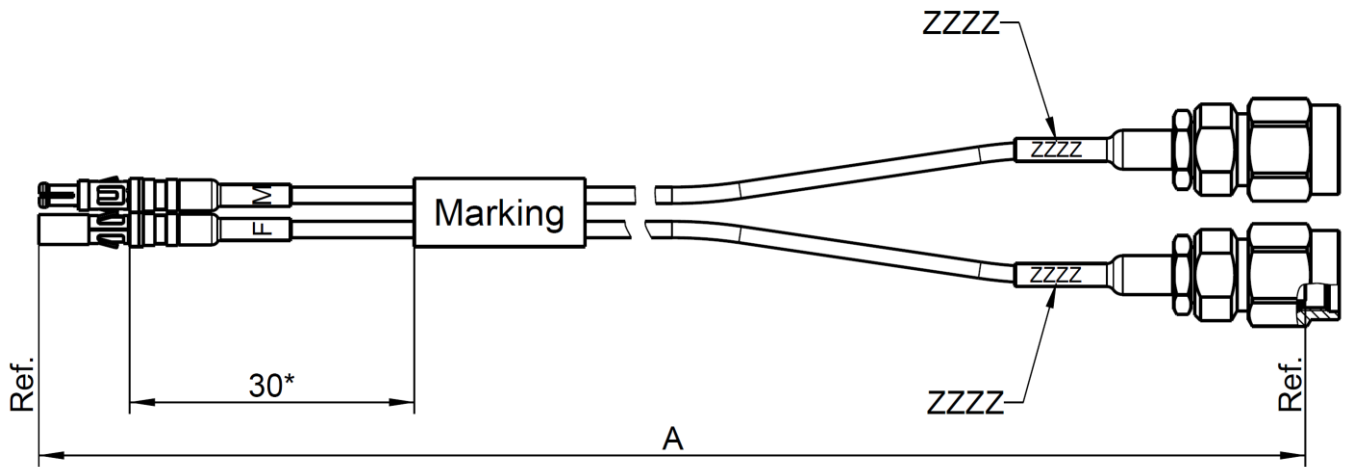

All dimensions are in mm; tolerances:  $\pm 3$  mm for  $A \leq 300$  mm;  $\pm 1\%$  for  $A > 300$  mm  
\*) movably

**Available variants**

Type	max. Insertion loss at 40 GHz	Marking	Weight (g) / pce
L99-A0483-XXX-Y	$\leq 0.0083 \text{ dB/mm} * A \text{ mm} + 1.2 \text{ dB}$	ROSENBERGER YYYY-WW L99-A0483-XXX-Y FAC-RRRRRRR	$0.011 \text{ g/mm} * A \text{ mm} + 8.4 \text{ g}$

XXX – length in mm = A

Y – pair matching (non, 2ps)

WW – week

YYYY – year

zzzz – individual serial no.

FAC – Factory Code

RRRRRRR – lot no.

Note:

max. Insertion Loss:

First constant = Cable attenuation in dB/mm; Second Constant = Connector left and Connector right +needed Adaptor

Weight:

First constant = Cable- and Armour- weight per mm; Second Constant = Connector left and Connector right weight per pce

**Assembly parts**

Connector left	Mini Coax plug	23S104-270L5
Connector left	Mini Coax jack	23K104-270L5
Connector right	RPC-2.92 plug	02S141-270L5
Cable	RTK 047	

**Assembly parts**

Assembly instruction	23 MV-A008
----------------------	------------

**Cable Set**

Mini Coax Plug / Jack – RPC-2.92 Plug – RTK 047

**L99-A0483-XXX-Y**

**Electrical data**

Impedance	50 Ω
Frequency	DC to 40 GHz
Return loss <sup>1</sup>	≥ 16 dB, DC to 20 GHz ≥ 10 dB, 20 GHz to 40 GHz
Insertion loss <sup>1</sup>	see table available variants
Phasematched by pairs	depending on Part Number non – non matched 2ps – max. 2 ps delay difference

Individual testing

The S-Parameters (S11, S22, S21, S12) will be tested and the cable pairs are measured fore phase matching.:

<sup>1</sup> Return Loss and Insertion Loss includes the measurement adaptor

**Mechanical data**

Minimum bend radius:	
Single	5.1. mm
Multiple	10.2 mm

**Housing**

2 Channel	23Z121-008
4 Channel	23Z121-007
6 Channel	23Z121-004
8 Channel	23Z121-005

**Tooling**

Extraction tool	23W100-000
-----------------	------------

**Environmental data**

Temperature range	-40°C to +115°C
RoHS	compliant

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

For the installation of the electrotechnical equipment, particular electrotechnical expertise is required.



Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
F. Reiner	29.07.19	F. Reiner	08.03.23	b00	23-0367	J. Rohloff	08.03.23

Rosenberger Hochfrequenztechnik GmbH & Co. KG  
 P.O.Box 1260 D-84526 Tittmoning Germany  
[www.rosenberger.com](http://www.rosenberger.com)

Tel. : +49 8684 18-0  
 Email : [info@rosenberger.com](mailto:info@rosenberger.com)

Page  
 2 / 2