



Cable assembly
RPC-1.85 plug – RTK 092-70 – RPC-1.85 plug

LU5-500-XXX

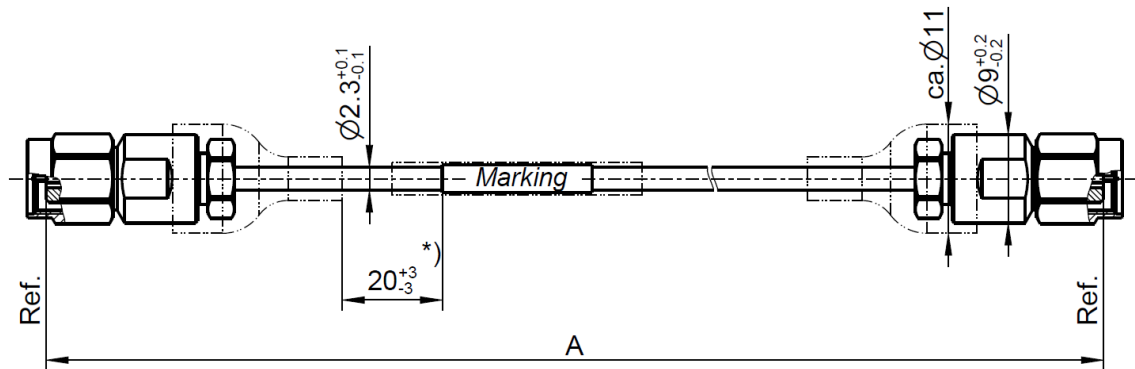

All dimensions are in mm; tolerances: ± 3 mm for $A \leq 300$ mm; $\pm 1\%$ for $A > 300$ mm
*) If length "A" < 150 mm marking is mount centric ± 5 mm

Available variants

Type	Insertion loss at 70 GHz	Marking	Weight (g) / pce
LU5-500-XXX	≤ 0.00639 dB/mm * A mm + 0.9 dB	ROSENBERGER LU5-500-XXX FAC-RRRRRRR 	0.0164 g/mm * A mm + 13.7 g

XXX – length in mm = A
ssss – serial no. FAC – Factory Code RRRRRRR – lot no. Barcode = includes factory code, lot no. and serial no.

Note: max. Insertion Loss:
First constant = Cable attenuation in dB /mm; Second Constant = Connector left and Connector right +needed Adaptor

Weight:
First constant = Cable- and Armour- weight per mm; Second Constant = Connector left and Connector right weight per pce

Assembly parts

Connector left	RPC-1.85 plug	08S129-2U5S3
Connector right	RPC-1.85 plug	08S129-2U5S3
Cable	RTK 092-70	

Electrical data

Impedance	50 Ω
Frequency	DC to 70 GHz
Return loss ¹	≥ 14 dB, DC to 70 GHz
Insertion loss ¹	see table available variants

Individual testing and documentation:
Measurement plot with all 4 S-Parameters (S11; S22; S21; S12) and the care and handling instruction are included with the cable assembly. Measurement adaptors used are mentioned in the commentary field.

¹ Return Loss and Insertion Loss includes the measurement adaptor

öffentlich | public

Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG

RF_35/09_14/6.2

Technical Data Sheet

Rosenberger

Cable assembly
RPC-1.85 plug – RTK 092-70 – RPC-1.85 plug

LU5-500-XXX

Mechanical data

Minimum bend radius:
Multiple 32 mm

Environmental data

Temperature range -40°C to +85°C
RoHS compliant

öffentlich | public

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

For the installation of the electrotechnical equipment, particular electrotechnical expertise is required.



Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Martin Moder	20.05.19	M. Hundseder	26.02.26	c00	26-0123	M. Gehl	26.02.26

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O.Box 1260 D-84526 Tittmoning Germany
www.rosenberger.com

Tel. : +49 8684 18-0
Email : info@rosenberger.com

Page
2 / 2